


# MMU-AP\_WH1 2-WAY CASSETTE

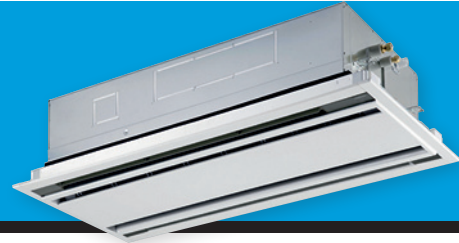

**Slim, compact and lightweight, the 2-way cassette has been design to fit easily and discretely into any room interior.**

### Comfort

- Unique air flow control, provides a balanced flow of air in two opposite directions, maximising air flow distribution. This feature when combined with the units fresh air intake ability helps to provide a perfect solution all year round.
- Enhanced indoor air quality with standard long-life filters with a wide bended surface to effectively, collect dust particles.

### Design

- The elegant white decoration panel allows the unit to be installed seamlessly into any room.

### Easy to install

- Minimal weight (19 kg) for units up to 4.5kw.
- Compact dimensions (height 295mm).
- Built-in drain pump.

CAPACITY



2.2kW > 18kW

SOUND PRESSURE LEVEL



30dB(A)

### OUTDOOR UNITS



Side Blow & Mini SMMS-e



SMMS-e



SHRM-e

### LOCAL CONTROLS



TCB-AX32E2



RBC-AMS55E-ES(EN)  
RBC-AMS41E  
RBC-AMT32E  
RBC-AS41E

### 2-WAY CASSETTE Performances

Indoor unit	MMU-	AP0072WH1/-TR	AP0092WH1/-TR	AP0122WH1/-TR	AP0152WH1/-TR	AP0182WH1/-TR	AP0242WH1/-TR	AP0272WH1/-TR	AP0302WH1/-TR	AP0362WH1/-TR	AP0482WH1/-TR	AP0562WH1/-TR
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	9.0	10.0	12.5	16.0	18.0
Power consumption	kW	0.029	0.029	0.029	0.030	0.044	0.054	0.054	0.064	0.076	0.088	0.117
Running current	A	0.23	0.23	0.23	0.24	0.32	0.39	0.39	0.46	0.48	0.57	0.75
Starting current	A	0.35	0.35	0.35	0.36	0.48	0.59	0.59	0.69	0.72	0.86	1.13

### 2-WAY CASSETTE Physical data

Indoor unit	MMU-	AP0072WH1/-TR	AP0092WH1/-TR	AP0122WH1/-TR	AP0152WH1/-TR	AP0182WH1/-TR	AP0242WH1/-TR	AP0272WH1/-TR	AP0302WH1/-TR	AP0362WH1/-TR	AP0482WH1/-TR	AP0562WH1/-TR
Air flow (h/m/l)	m <sup>3</sup> /h	558/498/450	558/498/450	558/498/450	600/534/450	900/750/618	1050/840/738	1050/840/738	1260/900/780	1740/1434/1182	1800/1482/1230	2040/1578/1320
Air flow (h/m/l)	l/s	155/138/125	155/138/125	155/138/125	167/148/125	250/208/172	291/233/205	291/233/205	350/250/780	483/398/328	500/412/342	567/438/367
Sound pressure level (h/m/l)	dB(A)	34/32/30	34/32/30	34/32/30	35/33/30	35/33/30	38/35/33	38/35/33	40/37/34	42/39/36	43/40/37	46/42/39
Dimensions (HxWxD)	mm	295x815x570	295x815x570	295x815x570	295x815x570	345x1180x570	345x1180x570	345x1180x570	345x1180x570	345x1600x570	345x1600x570	345x1600x570
Weight	kg	19	19	19	19	26	26	26	26	36	36	36
Panel dimensions (HxWxD)	mm	20x1050x680	20x1050x680	20x1050x680	20x1050x680	20x1415x680	20x1415x680	20x1415x680	20x1415x680	20x1835x680	20x1835x680	20x1835x680
Panel weight	kg	10	10	10	10	14	14	14	14	14	14	14
Connecting pipe, gas		3/8"	3/8"	3/8"	1/2"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"	5/8"
Connecting pipe, liquid		1/4"	1/4"	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Drain port diameter	mm	25	25	25	25	25	25	25	25	25	25	25
Power supply	V-ph-Hz	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50

BUSINESS