



CAPACITY

OPERATION



8HP > 120HP



-25°C > +52°C

With new chassis, new compressor, new heat exchanger, the SMMS-u, latest generation of Toshiba VRF, is achieving unrivalled efficiency and comfort level.


Features

PRELIMINARY DATA


Outdoor unit		MMY-	MUP0801HT8P-E	MUP1001HT8P-E	MUP1201HT8P-E	MUP1401HT8P-E	MUP1601HT8P-E	MUP1801HT8P-E	MUP2001HT8P-E	MUP2201HT8P-E	MUP2401HT8P-E	
Capacity range	HP		8 HP	10 HP	12 HP	14 HP	16 HP	18 HP	20 HP	22 HP	24HP	
Cooling capacity	kW		22.4	28.0	33.5	40.0	45.0	50.4	56.0	61.5	67.0	
Heating capacity +7°C (rated/max)	kW		22.4/25.0	28.0/31.5	33.5/37.5	40.0/45.0	45.0/50.0	50.4/56.0	56.0/63.0	61.5/69.0	67.0/70.0	
Power supply	V-ph-Hz		380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	380/415-3-50	
Efficiency	EER rated	W/W	3.97	3.35	3.24	2.75	3.20	3.17	3.11	3.01	2.77	
	EER 50% load	W/W	6.75	6.64	6.36	5.62	6.25	6.19	6.31	6.06	5.66	
	SEER	η/std	294.6%/7.44	306.2%/7.73	289.8%/7.32	279.0%/7.05	305.4%/7.71	304.2%/7.68	301.8%/7.62	286.2%/7.23	271.2%/6.87	
Efficiency	COP rated	W/W	4.24	3.89	4.31	4.00	3.77	4.02	3.75	3.80	3.53	
	COP 50% load	W/W	4.81	4.57	4.96	4.82	4.69	4.57	4.33	4.21	3.62	
	COP -7°C 100% load	W/W	3.37	3.07	3.42	3.00	2.88	3.06	2.88	2.94	2.73	
	SCOP	η/std	177.0%/4.5	188.2%/4.78	187.0%/4.75	181.0%/4.60	188.6%/4.79	187.0%/4.75	174.2%/4.43	174.6%/4.44	163.8%/4.17	
Electrical characteristic	Running current	A	C	9.1	13.4	16.0	22.6	21.6	24.4	27.7	31.4	37.1
	Power input	kW	C	5.64	8.36	10.34	14.55	14.06	15.90	18.01	20.43	24.19
	Running current	A	H	8.6	11.5	12.1	15.5	18.3	19.3	22.9	24.8	29.1
	Power input	kW	H	5.28	7.20	7.77	10.00	11.94	12.54	14.93	16.18	18.98
Dimensions (h x w x d)	mm		1690 x 990 x 780	1690 x 990 x 780	1690 x 990 x 780	1690 x 990 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	
Weight	kg		228	228	228	228	312	312	334	356	356	
Compressor	Type		Hermetic Twin Rotary	Hermetic Twin Rotary	Hermetic Twin Rotary	Hermetic Twin Rotary	Hermetic Triple Rotary	Hermetic Triple Rotary	Hermetic Triple Rotary	Hermetic Twin Rotary	Hermetic Twin Rotary	
	Motor output	kW	5.25	7.93	9.75	14	13.2	14.5	16.9	9.61x2	11.4x2	
Fan unit	Type		Propeller fan									
	Motor output	kW	1.0	1.0	1.0	1.0	2.0	2.0	2.0	2.0	2.0	
	Air volume	m3/h	9900	10500	11700	11880	15300	16800	15900	16500	16500	
External Static pressure available	Pa		80	80	80	80	80	80	80	80	80	
Refrigerant charge R410A	kg		6.0	6.0	6.0	6.0	9.0	9.0	9.0	9.0	9.0	
	CO ₂ Teq		12.53	12.53	12.53	12.53	18.79	18.79	18.79	18.79	18.79	
Power supply wiring	MCA	A	17	23	27	31	34	38	40	57	60	
	MCOP	A	20	32	32	40	40	50	50	63	80	
Pipe connection	Gas line type - diameter		Brazed - 3/4"	Brazed - 7/8"	Brazed - 1-1/8"	Brazed - 1-1/8"	Brazed - 1-1/8"	Brazed - 1-1/8"	Brazed - 1-1/8"	Brazed - 1-1/8"	Brazed - 1-3/8"	
	Liquid line type - diameter		Brazed - 1/2"	Brazed - 1/2"	Brazed - 1/2"	Brazed - 5/8"	Brazed - 5/8"	Brazed - 5/8"	Brazed - 5/8"	Brazed - 3/4"	Brazed - 3/4"	
Max. number of connected indoor units			18	22	27	31	36	40	45	49	54	
Sound pressure level	Cooling	dB(A)	53	55	58	58	60	61	63	63	63	
	Heating	dB(A)	56	58	62	62	63	67	67	67	67	
Sound power level	Cooling	dB(A)	75	77	79	79	83	84	86	86	86	
	Heating	dB(A)	76	77	81	82	86	89	90	90	90	
Operating Temperature range	Cooling	CDB	-10/52									
	Heating	CWB	-25/15.5									

C = Cooling mode H = Heating mode
Connected indoor units : MMU-UP***1HP-E

Installation space

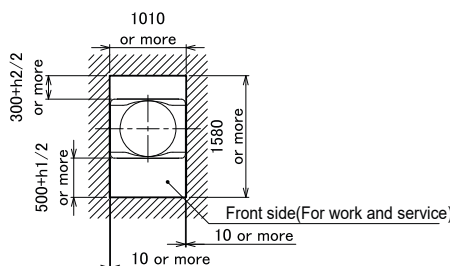



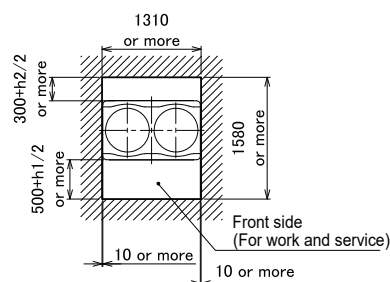























































Space required for service



- Leave space necessary for running, installation and servicing.
- If there is an obstacle above the outdoor unit, leave a space of 2000 mm or more to the top end of the outdoor unit.
- If there is a wall around the outdoor unit, make sure that its height does not exceed 800 mm.

Also applicable for SMMS stand alone and SHRME

Capacity table

Capacity		Combination	Modèle	EER/SEER	COP/SCOP	Max indoor connectivity	
HP	Cooling/Heating in kW						
8	22.4/22.4	8	MMY-MUP0801HT8P-E	3.97/7.44	4.24/4.50	18	
10	28.0/28.0	10	MMY-MUP1001HT8P-E	3.35/7.73	3.89/4.78	22	
12	33.5/33.5	12	MMY-MUP1201HT8P-E	3.24/7.32	4.31/4.75	27	
14	40.0/40.0	14	MMY-MUP1401HT8P-E	2.75/7.05	4.00/4.60	31	
16	45.0/45.0	16	MMY-MUP1601HT8P-E	3.20/7.71	3.77/4.79	36	
18	50.4/40.5	18	MMY-MUP1801HT8P-E	3.17/7.68	4.02/4.75	40	
20	56.0/56.0	20	MMY-MUP2001HT8P-E	3.11/7.62	3.75/4.43	45	
22	61.5/61.5	22	MMY-MUP2201HT8P-E	3.01/7.23	3.80/4.44	49	
24	67.0/67.0	24	MMY-MUP2401HT8P-E	2.77/6.87	3.53/4.17	54	
26	73.5/73.5	14 + 12	MMY-UP2611HT8P-E	2.95/7.17	4.14/4.67	58	
28	80.0/80.0	14 + 14	MMY-UP2811HT8P-E	2.75/7.05	4.00/4.6	63	
30	83.9/83.9	18 + 12	MMY-UP3011HT8P-E	3.20/7.52	4.13/4.75	64	
32	89.5/89.5	20 + 12	MMY-UP3211HT8P-E	3.16/7.50	3.94/4.55	65	
34	96.0/96.0	20 + 14	MMY-UP3411HT8P-E	2.95/7.38	3.85/4.50	66	
36	100.5/100.5	24 + 12	MMY-UP3611HT8P-E	2.91/7.01	3.76/4.38	67	
38	107.0/107.0	24 + 14	MMY-UP3811HT8P-E	2.76/6.93	3.69/4.33	68	
40	112.0/112.0	20 + 20	MMY-UP4011HT8P-E	3.11/7.62	3.75/4.43	69	
42	117.4/117.4	24 + 18	MMY-UP4211HT8P-E	2.93/7.22	3.72/4.43	70	
44	123.0/123.0	24 + 20	MMY-UP4411HT8P-E	2.91/7.21	3.63/4.30	71	
46	128.5/128.5	24 + 22	MMY-UP4611HT8P-E	2.88/7.04	3.65/4.31	72	
48	134.0/134.0	24 + 24	MMY-UP4811HT8P-E	2.77/6.87	3.53/4.17	73	
50	140.5/140.5	24 + 14 + 12	MMY-UP5011HT8P-E	2.86/7.02	3.82/4.44	74	
52	147.0/147.0	24 + 14 + 14	MMY-UP5211HT8P-E	2.76/6.96	3.77/4.41	75	
54	152.0/152.0	20 + 20 + 14	MMY-UP5411HT8P-E	3.01/7.49	3.81/4.47	76	
56	156.5/156.5	24 + 20 + 12	MMY-UP5611HT8P-E	2.98/7.23	3.75/4.41	77	
58	163.0/163.0	24 + 20 + 14	MMY-UP5811HT8P-E	2.87/7.19	3.71/4.37	78	
60	167.5/167.5	24 + 24 + 12	MMY-UP6011HT8P-E	2.85/6.95	3.66/4.3	79	
62	174.0/174.0	24 + 24 + 14	MMY-UP6211HT8P-E	2.76/6.92	3.63/4.27	80	
64	179.0/179.0	24 + 20 + 20	MMY-UP6411HT8P-E	2.97/7.34	3.67/4.34	81	
66	184.5/184.5	24 + 22 + 20	MMY-UP6611HT8P-E	2.95/7.21	3.68/4.35	82	
68	190.0/190.0	24 + 24 + 20	MMY-UP6811HT8P-E	2.86/7.09	3.59/4.26	83	
70	195.5/195.5	24 + 24 + 22	MMY-UP7011HT8P-E	2.84/6.98	3.61/4.26	84	
72	201.0/201.0	24 + 24 + 24	MMY-UP7211HT8P-E	2.77/6.87	3.53/4.17	85	
74	207.5/207.5	24 + 24 + 14 + 12	MMY-UP7411HT8P-E	2.83/6.97	3.72/4.36	86	
76	214.0/214.0	24 + 24 + 14 + 14	MMY-UP7611HT8P-E	2.76/6.93	3.69/4.33	87	
78	219.0/219.0	24 + 20 + 20 + 14	MMY-UP7811HT8P-E	2.93/7.30	3.72/4.39	88	
80	223.5/223.5	24 + 24 + 20 + 12	MMY-UP8011HT8P-E	2.91/7.14	3.68/4.34	90	
82	230.0/230.0	24 + 24 + 20 + 14	MMY-UP8211HT8P-E	2.84/7.10	3.66/4.32	92	
84	234.5/234.5	24 + 24 + 24 + 12	MMY-UP8411HT8P-E	2.83/6.95	3.62/4.26	94	
86	241.0/241.0	24 + 24 + 24 + 14	MMY-UP8611HT8P-E	2.77/6.91	3.60/4.25	96	
88	246.0/246.0	24 + 24 + 20 + 20	MMY-UP8811HT8P-E	2.91/7.21	3.63/4.30	98	
90	251.5/251.5	24 + 24 + 22 + 20	MMY-UP9011HT8P-E	2.97/7.12	3.64/4.30	100	
92	257.0/257.0	24 + 24 + 24 + 20	MMY-UP9211HT8P-E	2.84/7.03	3.58/4.24	102	
94	262.5/262.5	24 + 24 + 24 + 22	MMY-UP9411HT8P-E	2.82/6.95	3.59/4.24	104	
96	268.0/268.0	24 + 24 + 24 + 24	MMY-UP9611HT8P-E	2.77/6.87	3.53/4.17	106	
98	274.5/274.5	24 + 24 + 24 + 14 + 12	MMY-UP9811HT8P-E	2.82/6.95	3.67/4.31	108	
100	281.0/281.0	24 + 24 + 24 + 14 + 14	MMY-UP10011HT8P-E	2.76/6.94	3.65/4.30	110	
102	286.0/286.0	24 + 24 + 20 + 20 + 14	MMY-UP10211HT8P-E	2.89/7.2	3.68/4.34	112	
104	290.5/290.5	24 + 24 + 24 + 20 + 12	MMY-UP10411HT8P-E	2.88/7.08	3.65/4.30	114	
106	297.0/297.0	24 + 24 + 24 + 20 + 14	MMY-UP10611HT8P-E	2.83/7.04	3.63/4.29	116	
108	301.5/301.5	24 + 24 + 24 + 24 + 12	MMY-UP10811HT8P-E	2.82/6.93	3.60/4.24	118	
110	308.0/308.0	24 + 24 + 24 + 24 + 14	MMY-UP11011HT8P-E	2.77/6.90	3.58/4.23	120	
112	313.0/313.0	24 + 24 + 24 + 20 + 20	MMY-UP11211HT8P-E	2.88/7.13	3.61/4.28	122	
114	318.5/318.5	24 + 24 + 24 + 22 + 20	MMY-UP11411HT8P-E	2.87/7.07	3.62/4.28	124	
116	324.0/324.0	24 + 24 + 24 + 24 + 20	MMY-UP11611HT8P-E	2.82/7.00	3.57/4.22	126	
118	329.5/329.5	24 + 24 + 24 + 24 + 22	MMY-UP11811HT8P-E	2.81/6.93	3.58/4.23	128	
120	335.0/335.0	24 + 24 + 24 + 24 + 24	MMY-UP12011HT8P-E	2.77/6.87	3.53/4.17	128	



Piping rules

		Allowable value	Piping section	
Piping length	"Total extension of pipe (Liquid pipe, real length)"	Single ODU	500m	
		Combination ODU	1200m (*6)	
	Farthest piping length (*1)	Equivalent length	250m	
		Real length	210m	
	Equivalent length of farthest piping from 1st branching (*1)	90m (*2)	L3 + L4 + L5 + L6 + j	
	Equivalent length of farthest piping between outdoor units	40m	LA+LB+LC+Le (LA+LB+LC+Ld)	
	Max. equivalent length of main piping	Equivalent length	120m (*3)	L1
		Real length	100m (*3)	
	Max. equivalent length of outdoor unit connecting piping		10m	La, Lb, Lc, Ld, Le
Max. real length of indoor unit connecting piping		30m	a, b, c, d, e, f, g, h, i, j	
Max. equivalent length between branches		50m	L2, L3, L4, L5, L6, L7	
Difference in height	Height between indoor and outdoor units	Upper outdoor unit	70m (*4)(*7)	
		Lower outdoor unit	40m (*5)(*8)	
	Height between indoor units		40m (*9)	-
	Height between outdoor units		5m	-


(*1) : (e) is outdoor unit furthest from the 1st branch and (j) is the indoor unit furthest from the 1st branch.
 (*2) : If the height difference (H1) between indoor and outdoor unit exceeds 3 m, set 65 m or less.
 (*3) : If the max. combined outdoor unit capacity is 54HP or more, then max. equivalent length is 70 m or less (real length is 50 m or less).
 (*4) : If the height difference (H2) between indoor units exceeds 3 m, set 50 m or less.
 (*5) : If the height difference (H2) between indoor units exceeds 3 m, set 30 m or less.
 (*6) : Total charging refrigerant is 140kg or less.

(*7) : Extension up till 110m is possible with conditions below :
 -Single outdoor unit system
 -Connected ratio of indoor units to outdoor units is below 105%
 -Liquid side is been increased 1 size from the standard size
 (*8) : Extension up till 110m is possible with conditions below :
 -Multiple outdoor unit system
 -Connected ratio of indoor units to outdoor units is below 105%
 -Minimum capacity of connecting indoor unit is more than 3HP
 (*9) : If the connected ratio of indoor units to outdoor units is more than 105%, set 15 m.


Drawings

Unit: mm

MMY-MUP0801HT8P-E, MMY-MUP1001HT8P-E
MMY-MUP1201HT8P-E, MMY-MUP1401HT8P-E

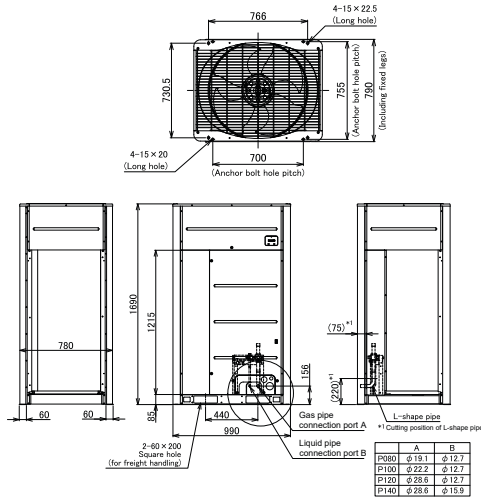

MMY-MUP1601HT8P-E, MMY-MUP1801HT8P-E, MMY-MUP2001HT8P-E,
MMY-MUP2201HT8P-E, MMY-MUP2401HT8P-E

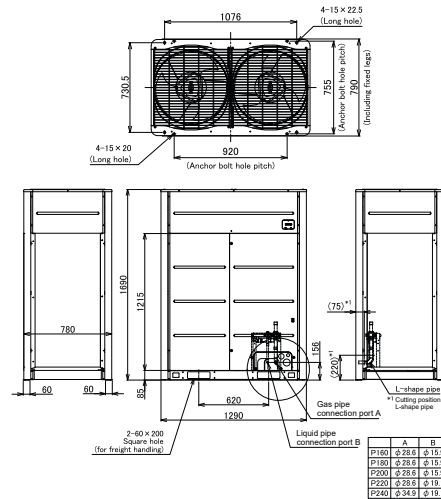


Sound pressure levels

Unit: dB(A)


MMY-MUP0801HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	53.0	56.0




MMY-MUP1001HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	55.0	58.0



MMY-MUP1201HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	58.0	62.0




Sound pressure levels

Unit: dB(A)


MMY-MUP1401HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	58.0	62.0




MMY-MUP1601HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	60.0	63.0




MMY-MUP1801HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	61.0	67.0




MMY-MUP2001HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	63.0	67.0




MMY-MUP2201HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	63.0	67.0



MMY-MUP2401HT8P-E

Sound pressure Level (dB(A))	Cooling	Heating
	63.0	67.0



Night mode sound pressure levels

Sound reduction and approximation capacity (reference)

type	Night operation sound reduction dB (A) cooling & heating	Capacity	
		Cooling	Heating
801	50	85%	80%
1001	50	70%	65%
1201	50	60%	55%
1401	53	70%	65%
1601	53	70%	70%
1801	54	65%	65%
2001	54	60%	60%
2201	54	55%	55%
2401	54	55%	55%

Condition : Cooling : (Indoor 27 deg DB, 19 deg WB) - (Outdoor temperature 25 deg DB)
Heating : (Indoor 20 deg DB) - (Outdoor temperature 7 deg DB, 6 deg WB)

Accessories

	Name	Model name	Capacity	Appearance	Remarks
Branching joints and headers	Y-shape branching joint	RBM-BY55E	under 6.4HP		
		RBM-BY105E	from 6.4 to 14.2HP		
		RBM-BY205E	from 14.2 to 25.2HP		
		RBM-BY305E	from 25.2 to 61.2HP		
		RBM-BY405E	61.2HP or more		
	4-branching header	RBM-HY1043E	under 14.2HP		
		RBM-HY2043E	from 14.2 to 25.2HP		
8-branching header	RBM-HY1083E	under 14.2HP			
	RBM-HY2083E	from 14.2 to 25.2HP			
Branching joint for connection of outdoor units	RBM-BT14E	under 26HP			
	RBM-BT24E	from 26HP to 62HP			
	RBM-BT34E	62HP or more			
Optional PCB of outdoor unit	Power peak-cut control board	TCB-PCDM4E			Limit capacity of the VRF outdoor unit at 85%, 75%, 70% or 60% load or stop it. Dry contact
	External master ON/OFF control board	TCB-PCMO4E			Dry contact
	Output control board	TCB-PCIN4E			Operation output : The operation indicator is on while any indoor unit in the system is operating. Error output : The error indicator is on when an error is occurred on even one of the indoor or outdoor units in the system. Dry contact